


Universal Conferencing Mount

For Video Bars and VC Cameras

Installation Guide

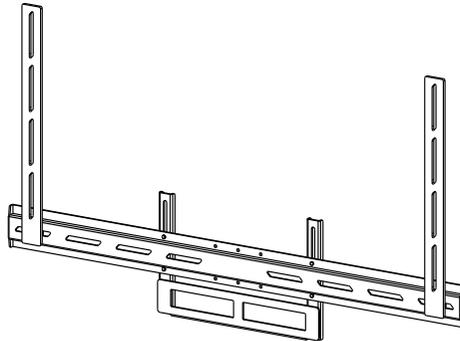

- Designed to mount a video bar / VC camera above or below a screen
- Mounts to the back of the screen* (**Use in conjunction with a flat screen mount*)
- Fits VESA fixings: min. 200mm - max. 800mm (horizontal)
- Suitable for use with the following VC equipment:

Bose Professional VB-S

Cisco Webex Room Kit Plus

Jabra Panacast 50

Logitech Rally Bar / Rally Bar Mini / Rally Bar Huddle / Meetup / Rally Plus

Maxhub UC S05 / UC S07 / UC S10 / UC S10

Neat.Bar / Bar Pro


Poly Studio / X30 / X50 / X70

Predia Connect Camera

Yealink UVC40 / MeetingBar A30 / MeetingEye 400 / MeetingEye 600 / MSpeaker II / UVC30 Room

Recommended Max Screen	Max Load	Max VESA
100" 254cm	10kg [22lbs]	800

Installation Safety Notes	2
Parts List	4
Installation Instructions	5
Typical Installations	17
Product Dimensions	18
B-Tech Contact Details	20



Installation Safety Instructions



Caution: This mount is intended for use only with the maximum weights indicated. Use with equipment heavier than the maximum indicated may result in instability causing possible injury.

Do not attempt to install this product until all instructions and warnings have been read and properly understood. *Please keep these instructions for future reference.*

Please check carefully to make sure there are no missing or defective parts - defective parts must never be used. B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire.

General

B-Tech AV Mounts recommends that a professional AV installer or other suitably qualified person install this product. Great care must always be taken during installation as most AV equipment is of a fragile nature, possibly heavy and easily damaged if dropped. If you do not fully understand the instructions or are not sure how to install this product safely, then please consult a professional for advice and/or to install this product for you. Failure to mount this product correctly may cause serious injury or death both during installation and at any time thereafter. Do not mount any AV equipment that exceeds the specific weight limit of the product you are installing. This weight limit will be clearly stated on each product and its packaging and will vary from product to product.

Product location

Please pay careful attention to where this product is located. Check load capacity of the structure prior to installation as some surfaces are not suitable for installation. Designed for indoor use, this mount is suitable for public or home installation. If located in a public or frequently populated area ensure that the product is out of the immediate reach of people. If any AV equipment is to be suspended over the likely path or location of people then great care should be taken to secure all parts of the installation from falling. When drilling holes it is essential to avoid contact with electrical cables and water or gas pipes contained within. Use of a good quality live wire detector and hidden object locator is therefore recommended. Only drill into structures when you are sure it is safe to do so.

Fixing hardware

It is highly recommended that all fixing screws be used where supplied and that the purpose of all other fixing hardware is fully understood. In some cases more AV equipment fixing hardware will be supplied to accommodate different models of equipment and set up configurations. The installer must be satisfied that any supplied fixing hardware is suitable for each specific installation. The fixing kit supplied with the product may not be suitable for all walls. If any fixing screws or included hardware are deemed not sufficient for a safe installation then please consult a professional or your local hardware store.

Hazard limitation


When routing cables take advantage of any built in cable management features that the product might provide and ensure that all cables are tidy and secure. Check to see that any moving aspect of the product can do so unhindered by any cabling. Some products have moving parts and the potential to cause injury through the crushing or trapping of fingers or other body parts. Particular attention to the nature of moving parts is required especially when assembling installing and adjusting during set up. Immediately after installation double-check that the work done is safe and secure. Double-check all necessary fixings are present and are of ample tightness. It is recommended that periodic inspections of the product and its fixing points are made as frequently as possible (no more than 6 months apart) to ensure that safety is maintained. If in doubt consult a professional AV installer or other suitably qualified person.

- CN B-Tech AV Mounts 建议本产品由专业AV安装人员或其他合格人员安装。B-Tech AV Mounts 及它的代理商、经销商不对由于不恰当的安装而造成的损失或伤害负责。本产品必须安装在合适的架构上，并仅用于不超过所标示的最大承重。
- CS Společnost B-Tech AV Mounts doporučuje provést instalaci tohoto produktu instalátora AV či jinak způsobilé osoby. Společnost B-Tech AV Mounts, její distributoři a prodejci nenesou prostřednictvím odborného odpov. osob. žádnou odpověď za škody nebo zranění způsobená nevhodnou instalací. Tento výrobek je nutno umístit do vhodné konstrukce a používat jen po uvedené maximální výšce.
- DE B-Tech AV Mounts empfiehlt, dass dieses Produkt durch einen qualifizierten AV-Techniker oder eine andere Person mit geeigneter Qualifikation installiert wird. B-Tech AV Mounts, ihre Distributoren und Händler können nicht für durch fehlerhafte Montage verursachte Beschädigung oder Verletzung haftbar bzw. verantwortlich gemacht werden. Dieses Produkt muss auf einem geeigneten Untergrund montiert werden und darf nur bis zum angegebenen Höchstgewicht verwendet werden.
- EN B-Tech AV Mounts recommends that this product be installed by a qualified AV technician or other suitably qualified person. B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire. This product must be mounted on a suitable surface and may only be used up to the specified maximum weight.
- ES B-Tech AV Mounts recomienda que un instalador de audio y video profesional u otra persona debidamente cualificada instalen este producto. B-Tech AV Mounts, sus distribuidores y concesionarios no se hacen cargo ni se responsabilizan de ningún daño o lesión provocados por una instalación inapropiada. Este producto se debe montar en una estructura adecuada y se debe utilizar soportando solamente hasta el peso máximo indicado.
- FR B-Tech AV Mounts recommande de confier l'installation de ce produit à un installateur AV professionnel ou à une autre personne dûment qualifiée. B-Tech AV Mounts, ses distributeurs et ses revendeurs ne sauraient être tenus responsables de tout dégât ou de toute blessure résultant d'une installation incorrecte. Ce produit doit être monté sur un support approprié et utilisé dans la limite du poids maximum indiqué.
- IT B-Tech AV Mounts consiglia di affidare l'installazione di questo prodotto a un installatore specializzato o ad altra persona adeguatamente qualificata. B-Tech AV Mounts, i suoi distributori e rivenditori non accettano alcuna responsabilità nei riguardi di eventuali danni o infortuni causati da un'errata installazione. Questo prodotto deve essere fissato a una struttura idonea e utilizzato unicamente sino al peso massimo indicato.
- JP B-Tech AV Mounts はAV設置の専門家または適合した知識を備えた人が製品を設置することを推奨します。B-Tech AV Mountsと販売店、取引先はこうした安全指針に従わない場合に随伴される製品の損傷や傷害に対する責任を負いません。場合によって製品が設置されるに適していないところもあるので設置位置に特別な注意を傾けてください。この製品の位置に注意を傾けて設置に適していない壁があるかを確認してください。指定した重さ制限を超過するAV装備を装着しないでください。
- KR B-Tech AV Mounts 는 AV 설치 전문가 또는 적합한 지식을 갖춘 사람이 제품을 설치하도록 권장합니다. B-Tech AV Mounts 와 판매점, 거래처는 이러한 안전 지침을 따르지 않을 경우 수반될 제품의 손상이나 상해에 대한 책임을 지지 않습니다. 경우에 따라 제품이 설치되기에 적합하지 않은 곳들도 있으므로 설치 위치에 특별한 주의를 기울여 주시기 바랍니다. 제품의 설치 위치에 주의를 기울여 확인하십시오. 지정된 무게 제한을 초과하는 AV 장비를 장착하지 마십시오.
- NL B-Tech AV Mounts adviseert om dit product te laten installeren door een professionele AV-instalateur of andere hiervoor gekwalificeerde persoon. B-Tech AV Mounts, haar distributeurs en dealers zijn niet aansprakelijk of verantwoordelijk voor schade of letsel die is veroorzaakt door onoordeelkundige installatie. Dit product moet worden gemonteerd aan een geschikte constructie, waarbij het aangegeven maximum gewicht niet mag worden overschreden.
- PL Firma B-Tech AV Mounts zaleca, aby ten produkt był instalowany przez profesjonalnych instalatorów AV lub inny odpowiednio przeszkolony personel. Firma B-Tech AV Mounts, jej dystrybutorzy i dealerzy nie ponoszą odpowiedzialności za uszkodzenia lub obrażenia ciała powstałe w wyniku nieprawidłowej instalacji. Niniejszy produkt musi być amontowany na odpowiedniej powierzchni, a podczas użytkowania nie wolno przekraczać podanego maksymalnego obciążenia.
- PT A B-Tech AV Mounts recomenda que a instalação deste produto seja efectuada por um instalador de AV instalador de AV profissional ou outra pessoa devidamente habilitada. A B-Tech AV Mounts e os seus distribuidores e concessionários não são responsáveis por danos ou lesões causados por uma instalação incorrecta. Este produto tem de ser montado numa estrutura adequada e utilizado somente até ao peso máximo indicado.
- RU Компания B-Tech AV Mounts рекомендует, чтобы установка данного изделия производилась инженером по установке аудио-видеотехники или другим специалистом с соответствующей квалификацией. Компания B-Tech AV Mounts ее дистрибьюторы и дилеры не несут ответственности за повреждения или травмы, полученные в результате неправильной установки.

توصي بي-تيك للتجارة الدولية المحدودة بأن شخص محترف في تركيب ال AV أو شخص مؤهل تأهيلا مناسباً لتركيب هذا المنتج. بي-تيك للتجارة الدولية، موزعها والتجار ليست عرضة أو مسؤولة عن الأضرار أو الإصابات الناجمة عن تركيب غير سليم، والاستخدام غير السليم أو عدم مراعاة هذه التعليمات السلامة. يجب أن يتم تركيب هذا المنتج في بنية مناسبة ويجب استخدامه فقط لدعم الحد الأقصى للوزن المشار إليه.

BT7870 Parts List

Please keep this for future reference

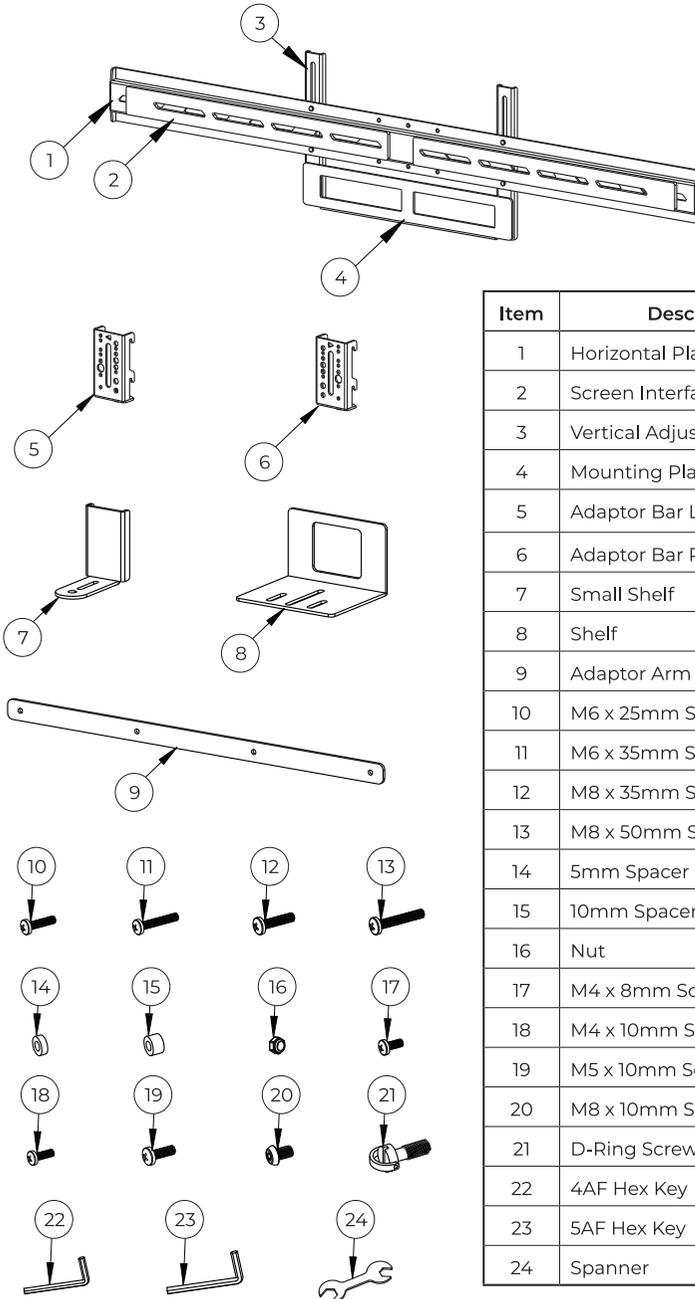


Item	Description	Qty
1	Horizontal Plate	1
2	Screen Interface Arm	2
3	Vertical Adjustment Arm	2
4	Mounting Plate	1
5	Adaptor Bar Left	1
6	Adaptor Bar Right	1
7	Small Shelf	2
8	Shelf	1
9	Adaptor Arm	1
10	M6 x 25mm Screw	4
11	M6 x 35mm Screw	4
12	M8 x 35mm Screw	4
13	M8 x 50mm Screw	4
14	5mm Spacer	6
15	10mm Spacer	4
16	Nut	6
17	M4 x 8mm Screw	4
18	M4 x 10mm Screw	2
19	M5 x 10mm Screw	2
20	M8 x 10mm Screw	4
21	D-Ring Screw	1
22	4AF Hex Key	1
23	5AF Hex Key	1
24	Spanner	1

Suitable for loads up to 10kg (22lbs)

Installation Instructions



1. Remove Interface Arms From Mounting Plate

- i. Unscrew the nuts and remove *item 2* from *item 1*.

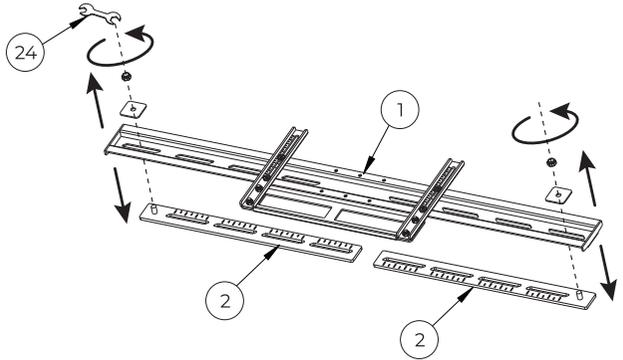


Fix Position of Interface Arms

- ii. Align *item 2* with the bottom* VESA fixings on the rear of the screen
- iii. Lock *item 2* in position on *item 1*.

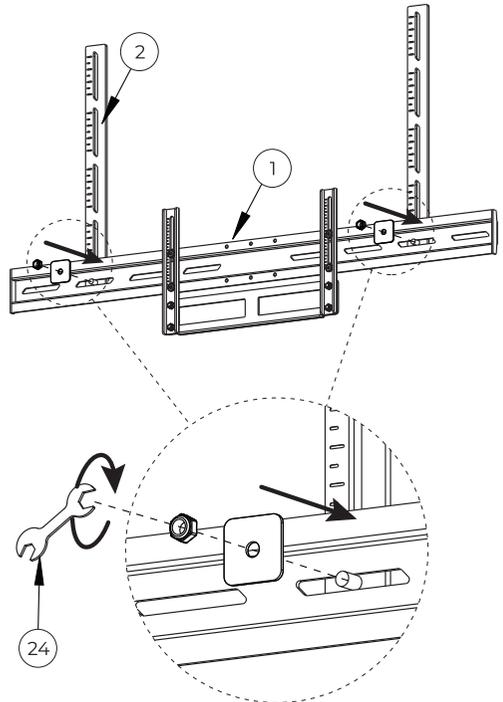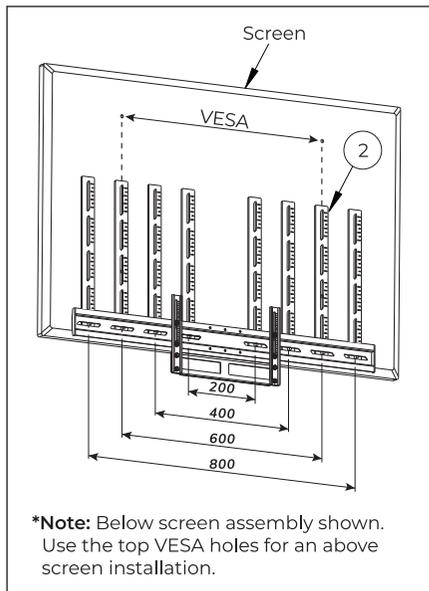

Set Mounting Plate Position



- iii. Loosen the screws connecting *item 3* to *item 1*, move *item 4* to its lowest position on *item 1* and re-tighten screws.

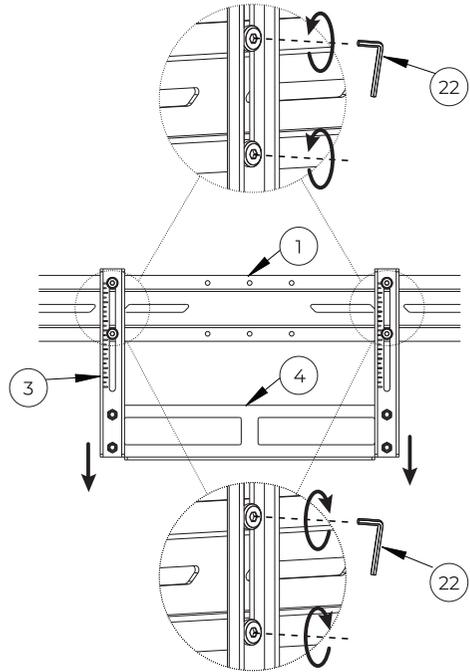


2. Fix Mount To Rear Of Screen

- i. Determine the vertical position of *item 2* on the back of the screen by positioning *item 1* approximately 50mm (2") above* the bottom of the screen.

***Note:** If installing videobar above the screen, position *item 1* approx 50mm (2") from the top of the screen and rotate *item 4* 180°

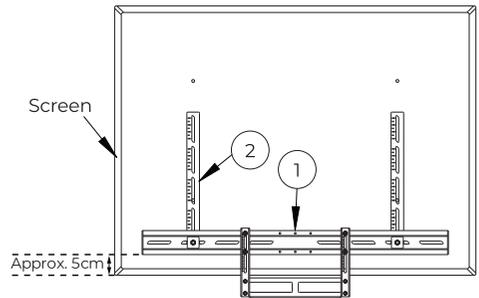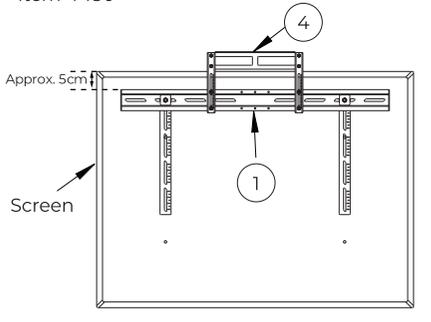




Below screen installation shown.
Refer to page 16 for above screen set-up.



ii. Attach *item 2* to the rear of the screen using the interface arms from a screen mount (*supplied separately*).

Note: Use 5mm spacers (*item 14*) on the top fixing holes of the screen.

iii. Follow the screen mount instructions to install the screen onto its mount.

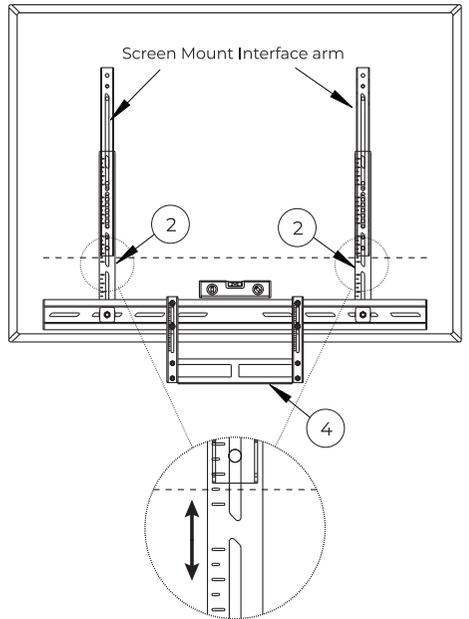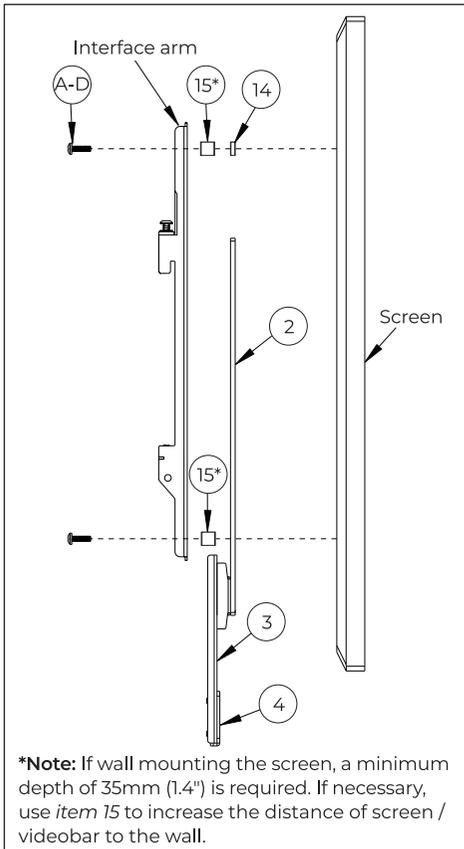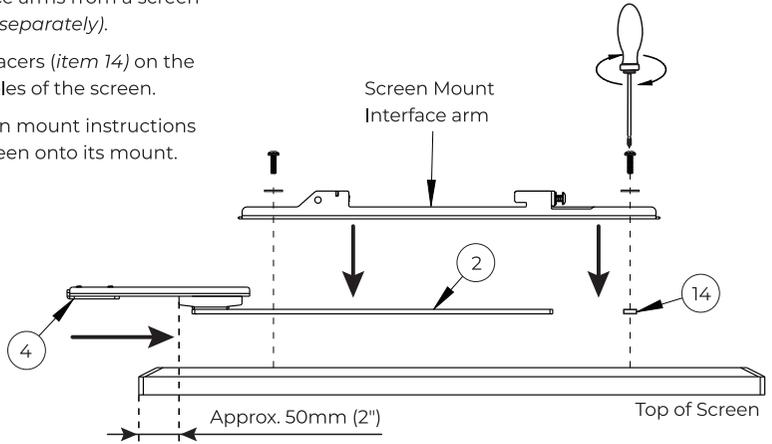

***Note:** If wall mounting the screen, a minimum depth of 35mm (1.4") is required. If necessary, use *item 15* to increase the distance of screen / videobar to the wall.

3a. Mount Video bar

Installation for the following products:

Bose Professional VB-1

Cisco Webex Room Kit Plus

Jabra Panacast 50

Logitech MeetUp








Neat.Bar

Neat.Bar Pro



Poly Studio X50 / X70

Yealink MSpeaker II

i. Determine which hole patterns on items 5 & 6 are suitable for the videobar



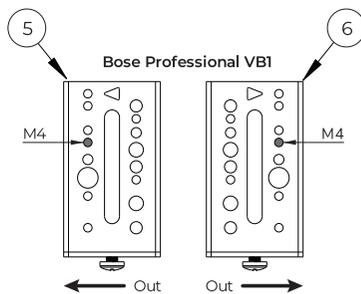


ii. Loosen the locking screws on the bottom of *items 5 & 6* and fix to the back of the video bar.

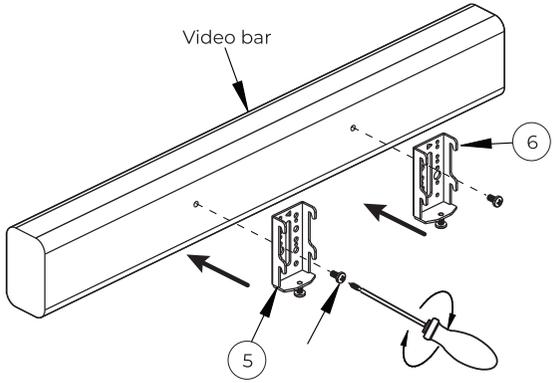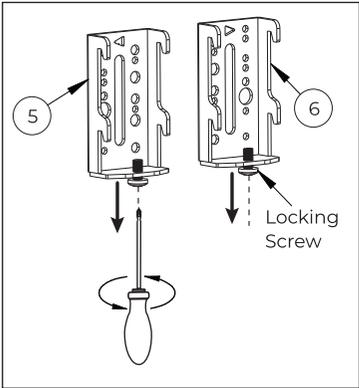

iii. Using *items 5 & 6* hook the video bar onto *item 4*.

iv. Tighten locking screw on the bottom of *items 5 & 6* to secure video bar to mount.

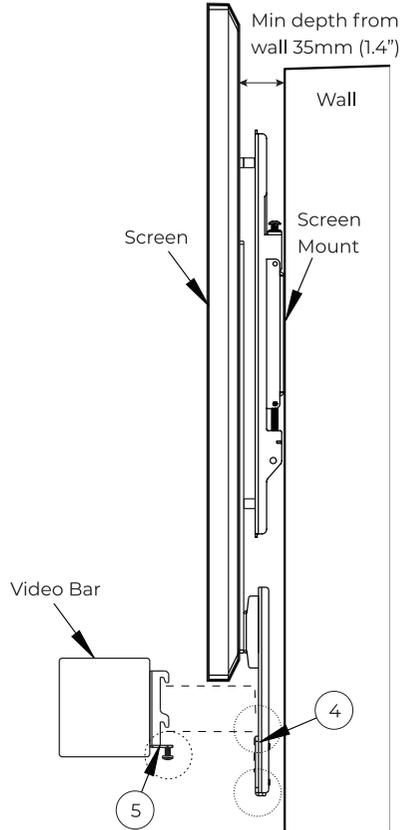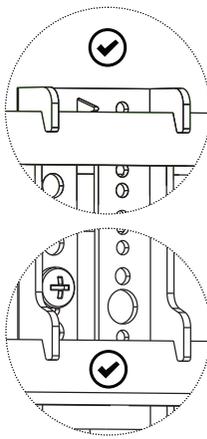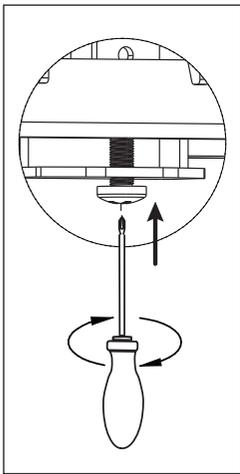

3b. Mount Video Bar




Installation for the following products:

Logitech Rally Bar



Logitech Rally Bar Mini

Logitech Rally Bar Huddle

- i. Loosen the locking screws on *items 5 & 6*.
- ii. Attach *item 7* to *items 5 & 6* using *item 16*.
- iii. Fix the video bar to *item 7*.

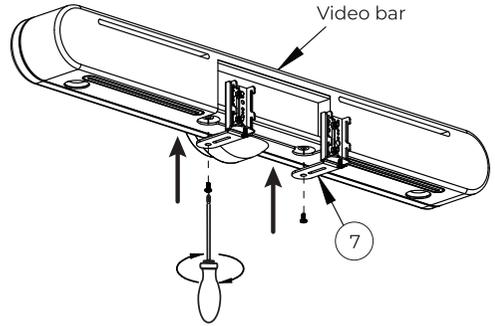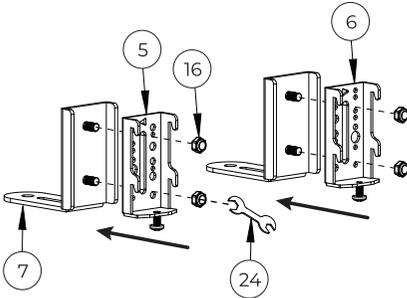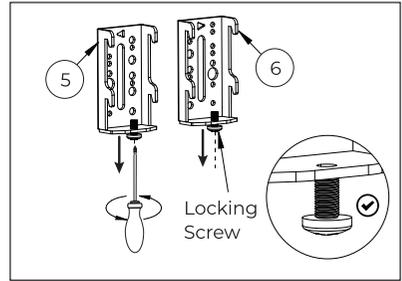

- iv. Using *items 5 & 6* hook video bar onto *item 4*.
- v. Tighten locking screw on the bottom of *items 5 & 6*.

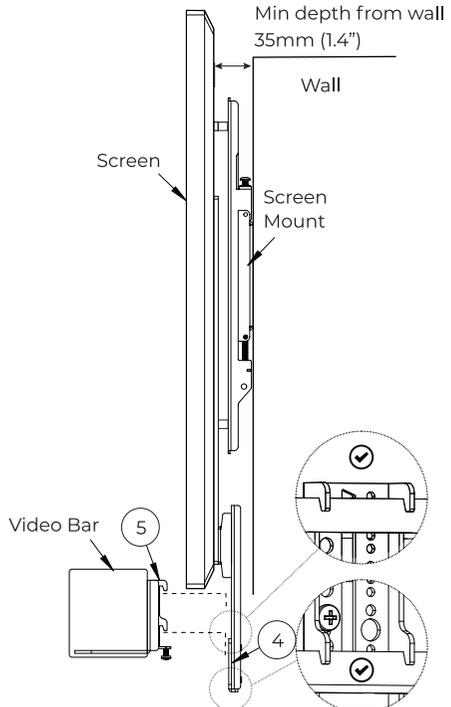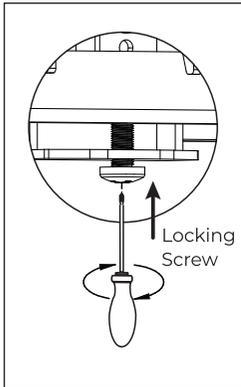

3c. Mount Video Bar

Installation for the following products:

Bose Professional VB-S

Poly Studio

Poly Studio X30



Yealink UVC40

Yealink MeetingBar A30


Yealink MeetingEye 400

Yealink MeetingEye 600



- i. Loosen the locking screws on *items 5 & 6*.
- ii. Attach *item 8* to *items 5 & 6* using *item 16*.
- iii. Fix video bar to *item 8*.

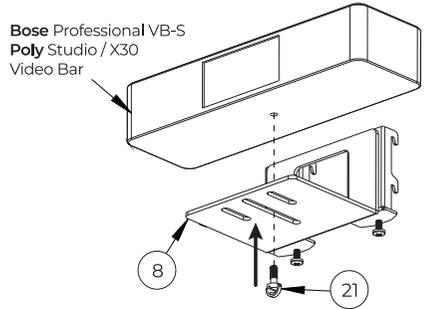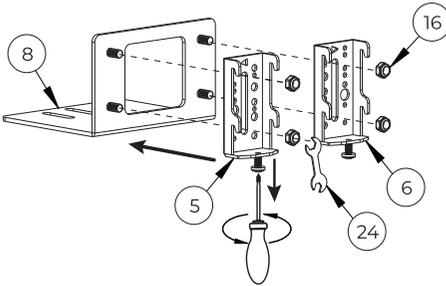

Yealink UVC40 / MeetingBar A30 / MeetingEye 400 / MeetingEye 600 Video Bar



- iv. Using *items 5 & 6* hook video bar onto *item 4*.
- v. Tighten locking screw on the bottom of *items 5 & 6*.

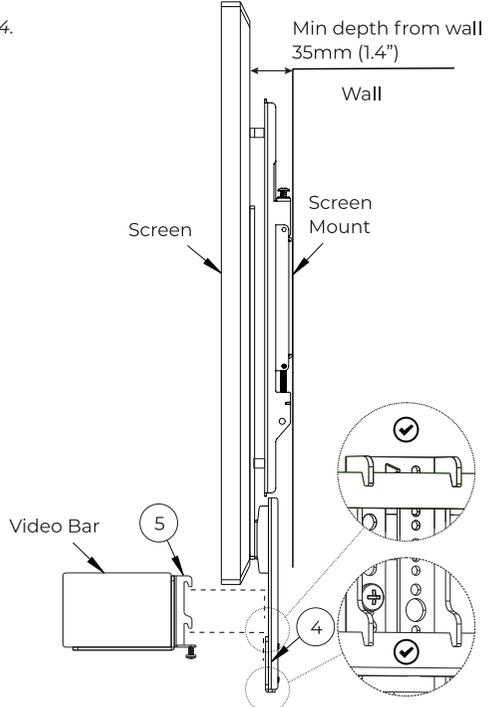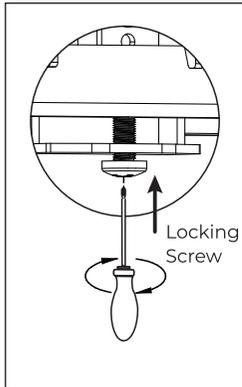


3d. Mount Speakers


Installation for the following products:

Logitech Rally Plus (Speakers)


i. Remove *item 4* from *item 3*.

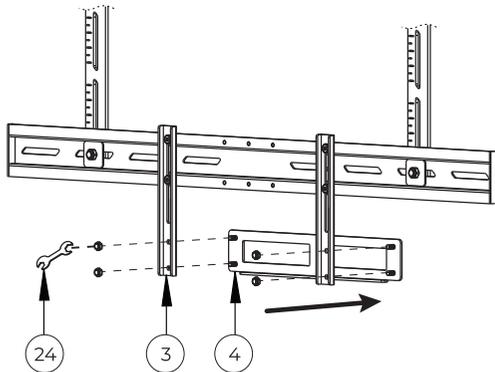

ii. Attach *item 9* to *item 3*.

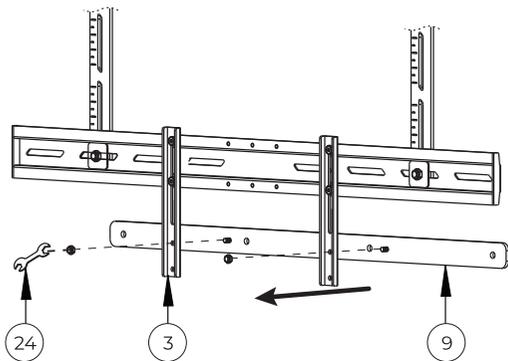

iii. Fix speakers to *item 9* using *item 20*.

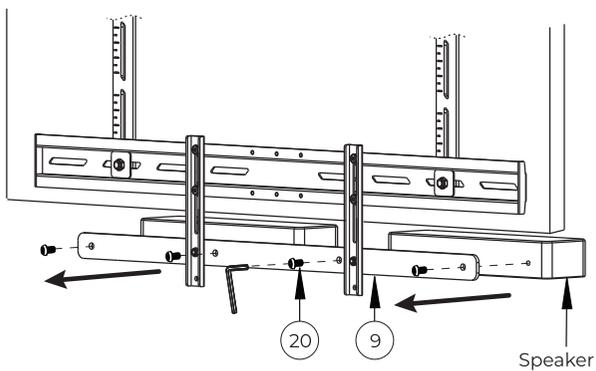

3e. Mount VC Camera



Installation for the following products:

Yealink UVC30 Room



Predia Connect Camera

Small VC cameras


- i. Remove *item 4* from *item 3*.
- ii. Remove *item 3* from *item 1*.

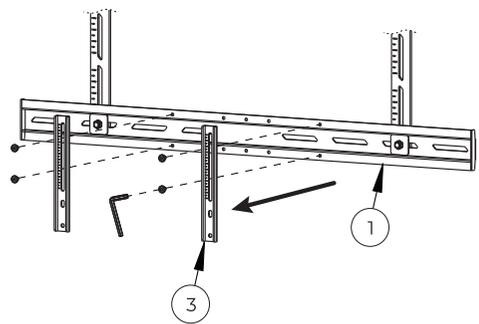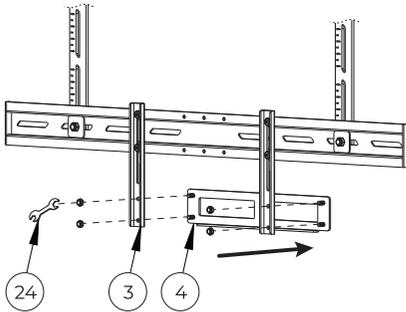

- iii. Attach *item 7* to *item 3*.
- iv. Fit *item 3* to *item 1*.

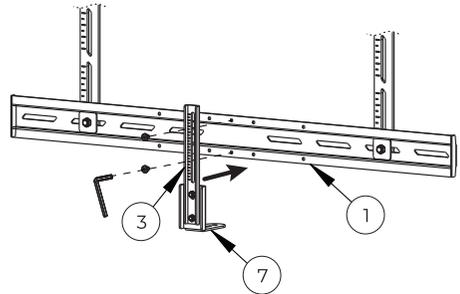

- v. Fix camera to *item 7* using *item 21*.

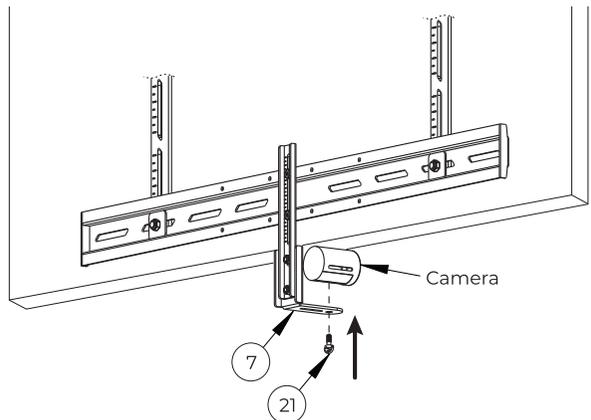

3f. Mount Video Bar

Installation for the following products:


Maxhub UC S05

Maxhub UC S07



Maxhub UC S10

Maxhub UC S10 Pro


- i. Remove *item 4* from *item 3*.
- ii. Remove *item 3* from *item 1*.

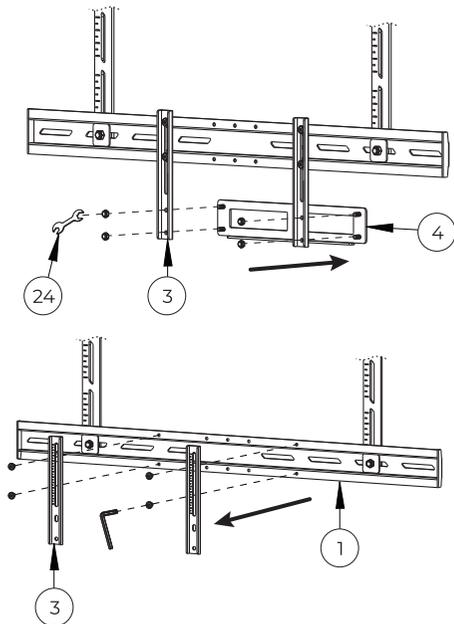

- iii. Attach *item 8* to *item 3* using *item 16*.
- iv. Fit *item 3* centrally on *item 1*.

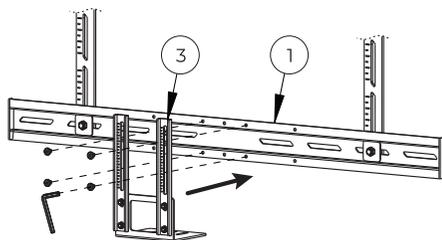



- v. Fix video bar to *item 8*.


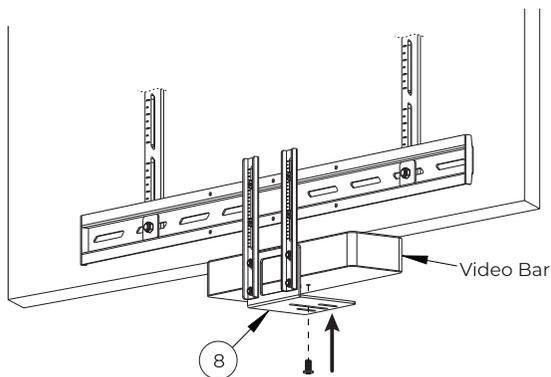


4. Adjust Mount Height

- i. Loosen the screws on the back of *item 3* and adjust the height of the video bar to the desired position.

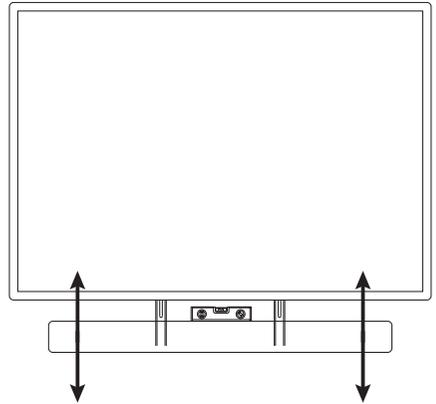
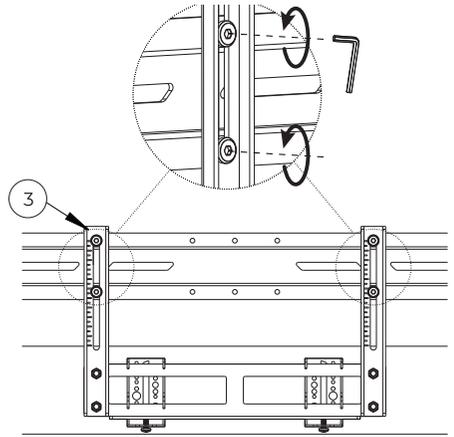


- ii. Once in position, re-tighten the screws on the back of *item 3*.


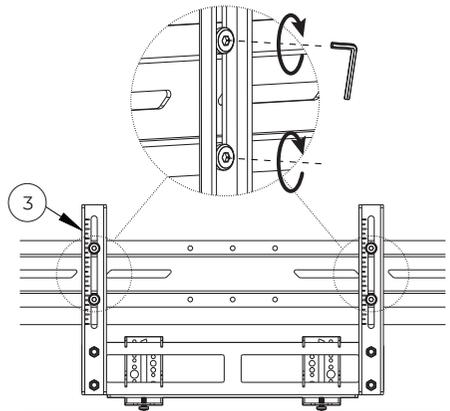
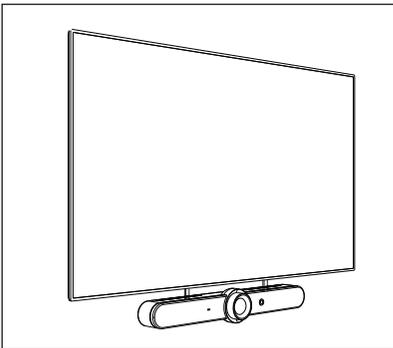


Mounting A Video Bar Above The Screen

- i. Using the top VESA fixing holes on the rear of the screen align *item 2* on *item 1*.

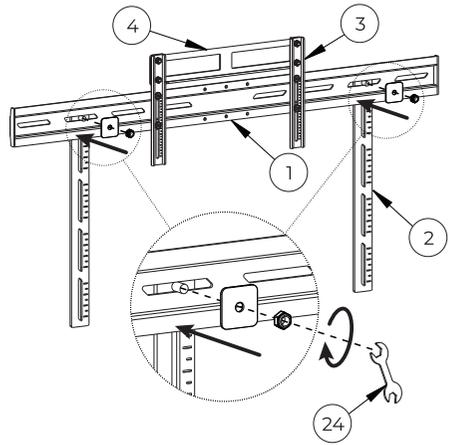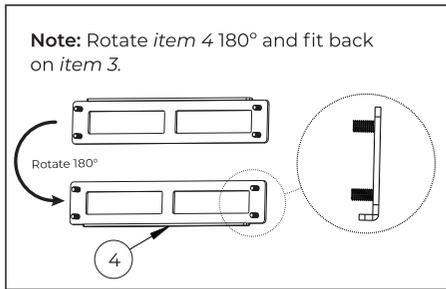


- ii. Fix *item 2* to the back of the screen using the screen mount's interface arms.
- iii. Install screen onto the screen mounting plate.
- iv. Hook video bar onto *item 4* using the appropriate adaptor (refer to **Step 3**).

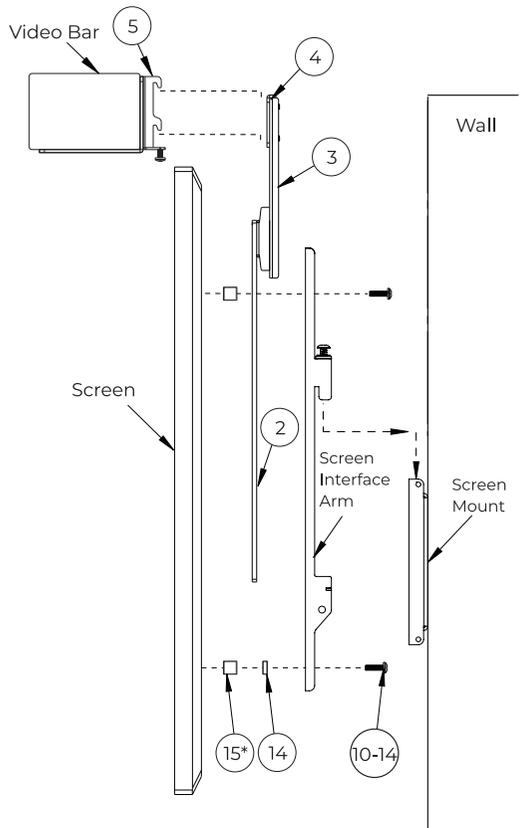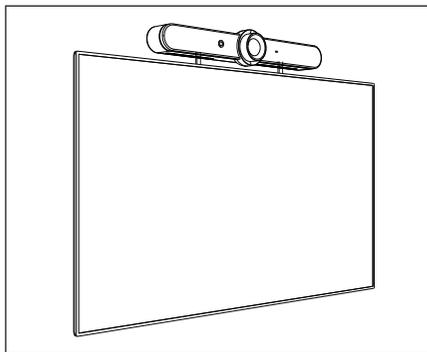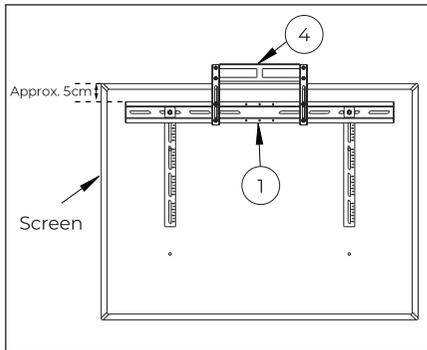

*Optional: If wall mounting the screen, a minimum depth of 35mm (1.4") is required.


Typical Installations

BT8228 Twin Cantilever Arm Flat Screen Wall Mount with **BT7870** Universal Conferencing Mount installed above the screen.

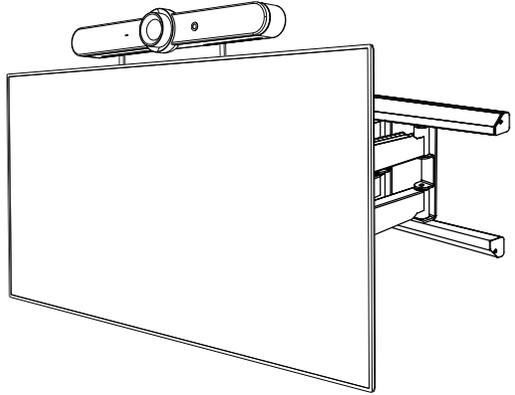

BT8546 XL Interactive Touchscreen Trolley with **BT7870** Universal Conferencing Mount installed below the screen.


Note: The max horizontal VESA fixings on the BT8546 will be reduced to 800mm when using the BT7870.

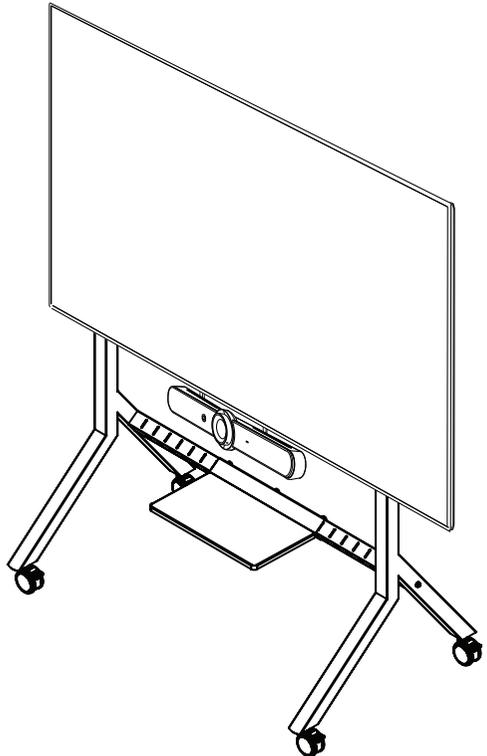


BT7870 Dimensions

Please keep this for future reference

Front View

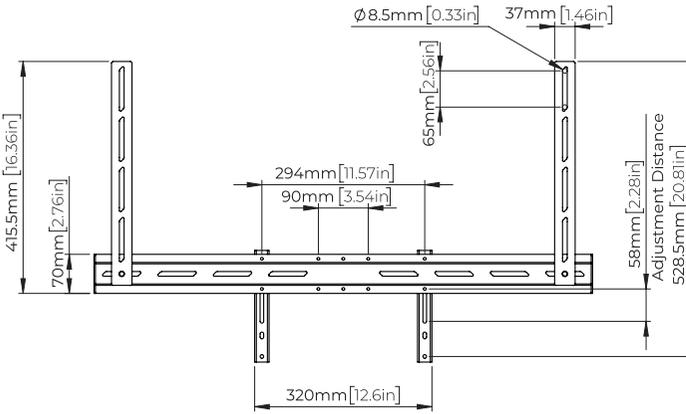



Side View

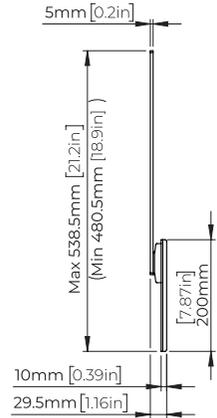


Top View



Back View

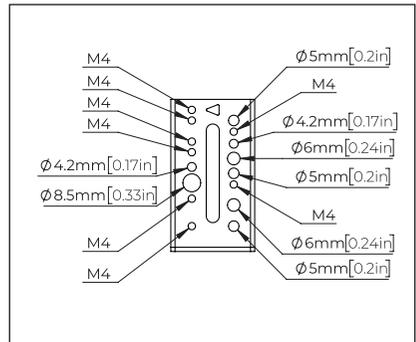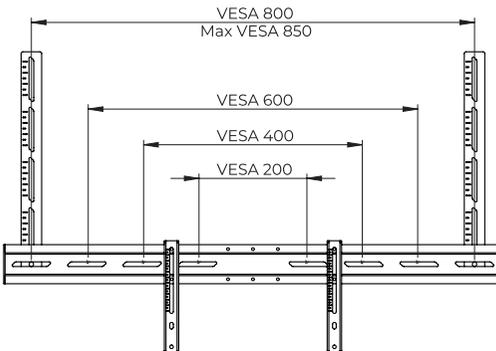

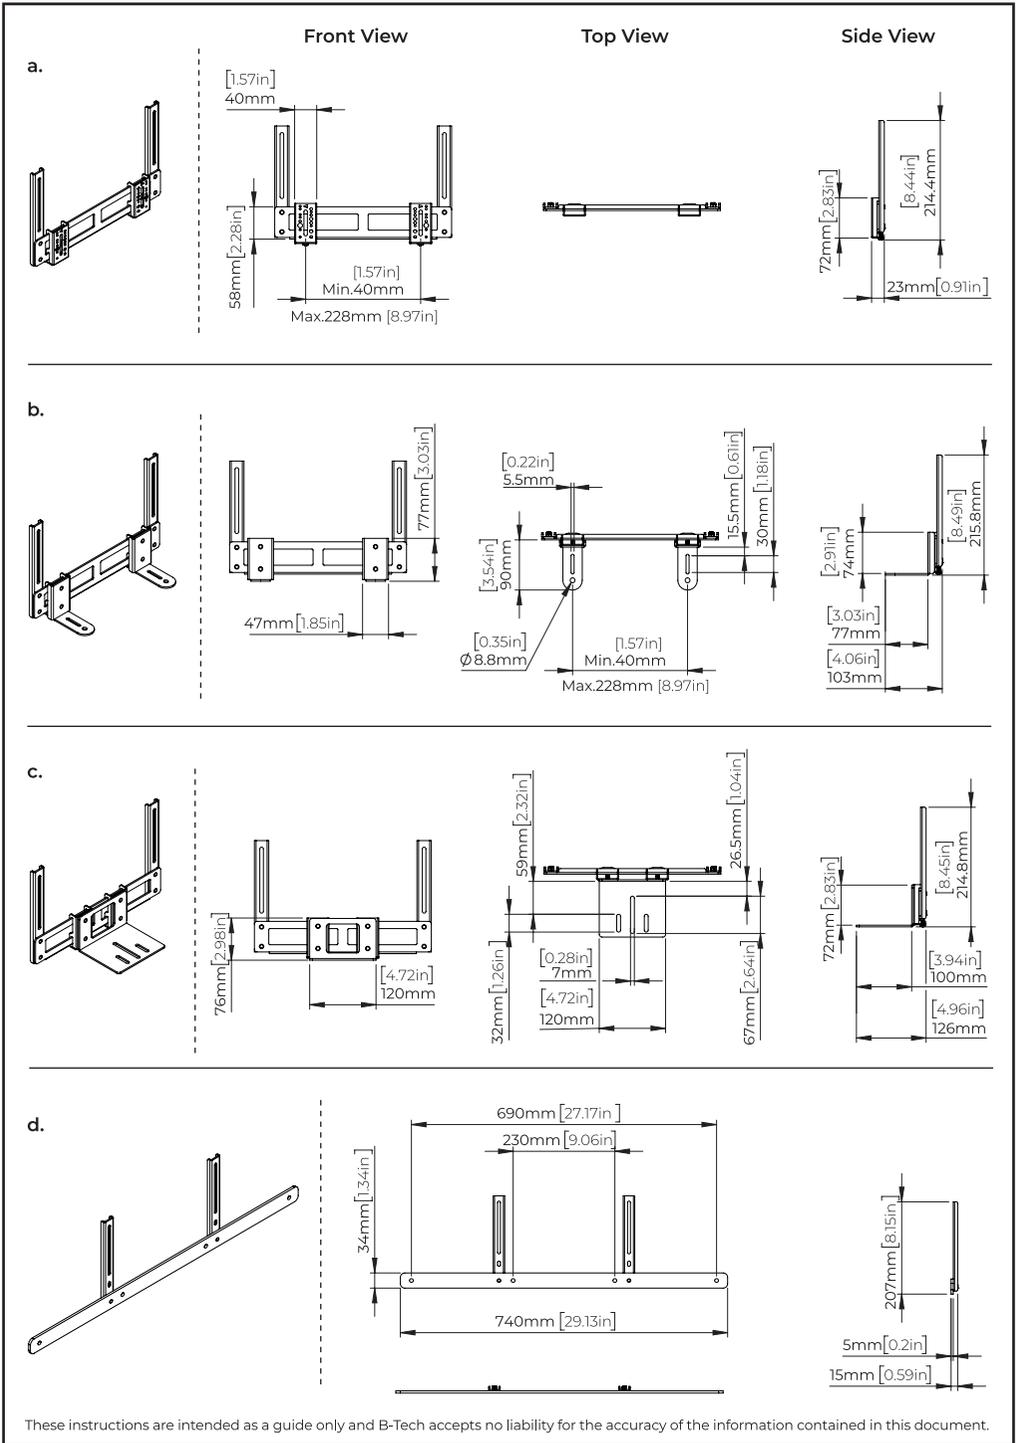

These instructions are intended as a guide only and B-Tech accepts no liability for the accuracy of the information contained in this document.

BT7870

Contact: info@btechavmounts.com

©2024 B-Tech AV Mounts Corporation Ltd. All rights reserved.

B-Tech AV Mounts is a division of B-Tech AV Mounts Corporation Ltd.

B-Tech AV Mounts and the B-Tech logo are registered trademarks.

All B-Tech images and symbols are exclusive property of B-Tech AV Mounts Corporation Ltd.

All other brands and product names are trademarks of their respective owners.

Any reproduction, retransmission or republication of any part of this manual is strictly prohibited,

unless prior written permission has been granted by B-Tech AV Mounts Corporation Ltd.

Photographs are for illustrative purposes only. E&OE

AMA-BT7870-VI-0924-I37 Made in the P.R.C.

