


Ultra-Slim Rail Mounting Bracket

Use With BT8390 Mounting Rails

Installation Guide

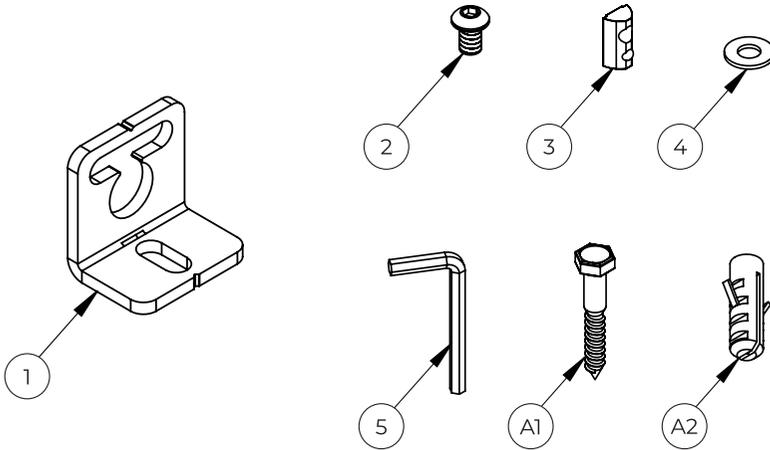

Item	Description	Qty
1	Wall Fixing Bracket	2
2	M8 x 12mm Screw	6
3	M8 Sliding Nut	6
4	M8 Washer	2
5	5AF Hex Key	1
Wall Fixing Kit		
A1	M8 x 50mm Coach Screw	2
A2	N°10 Wall Plug	2

Designed to work in conjunction with B-Tech's System X range
Also suitable for mounting BT8392 rails



When used in pairs

Installation Safety Instructions



Caution: This mount is intended for use only with the maximum weights indicated. Use with equipment heavier than the maximum indicated may result in instability causing possible injury.

B-Tech AV Mounts, it's distributors and dealers are not responsible for damage or injury caused by improper installation, improper use, modifications, installations over the specified weight capacity and/or failure to observe these safety instructions. In such cases, any warranty will expire.

It is recommended that this product should only be installed by a qualified professional / installer.

B-Tech AV Mounts does not claim any liability for any difficulties that may arise from the interpretation contained in these instructions. Failure to mount this product correctly may lead to serious injury and/or death.

Please check carefully to make sure there are no missing or defective parts - defective parts must never be used.

In the event of missing and/or defective parts, or technical questions, please contact an authorised dealer.


Pay careful attention to where this product is located, some locations are not suitable for installation. For indoor use only. It is recommended that periodic inspections of the product are made as frequently as possible to ensure that safety is maintained.

Please keep these instructions for future reference.


Installation Instructions

1. Attach The Wall Plates To A Mounting Rail

- i. Insert *item 3* into the top and bottom channels of a BT8390 rail.

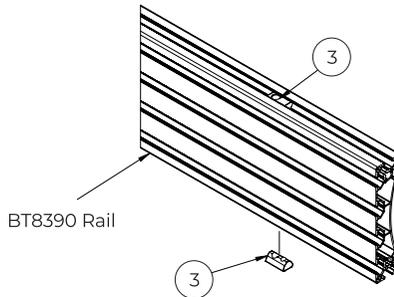


- ii. Fix *item 1* to the top and bottom of the rail using *items 2, 3 & 4*.

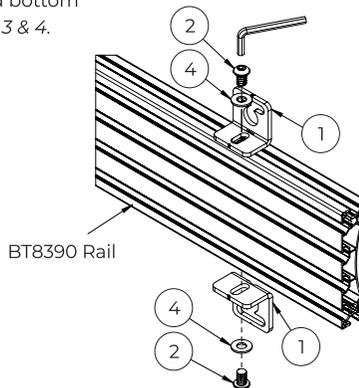

Installation Tools Required

Drill
10mm (7/16") masonry bit
or 4mm (5/32") wood bit



Pencil



Spanner



Level



Quantity of brackets required per rail length (landscape installs):*

Rail Length	Qty
0 - 1500mm (0-59")	2pcs
1501 - 3000mm (59"-118")	3pcs
3001 - 4500mm (118"-177")	4pcs
4501 - 6000mm (177"-236")	5pcs
6001 - 7500mm (266"-295")	6pcs

*Contact:
technical@btechavmounts.com
for portrait configurations




2. Fixing Rail Mounting Bracket To The Wall

Keyhole mounting


- i. Mark and drill two fixing holes. Insert *item A2* into both holes and *item A1* into the top hole.

Note: Do not fully tighten *item A1*, allow a gap (approx. 10mm) to hook on *item 1*.


- ii. Hook rail onto *item A1* using the keyhole fixings on *item 1*.
- iii. Once the rail is hooked on, screw *item A1* into the bottom *item 1* and tighten all fixings.

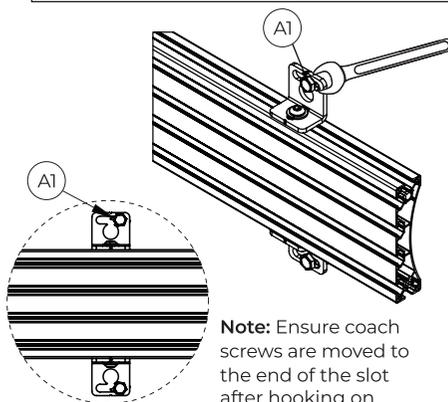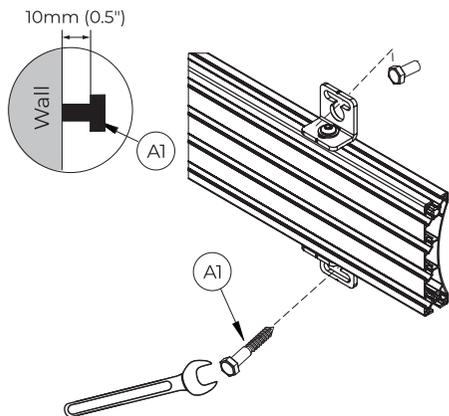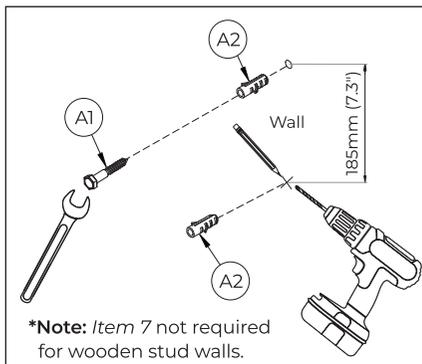


- iv. If necessary, loosen *item 2* (top and bottom) and adjust the rail so it is flat against the wall. Re-tighten *item 2*.

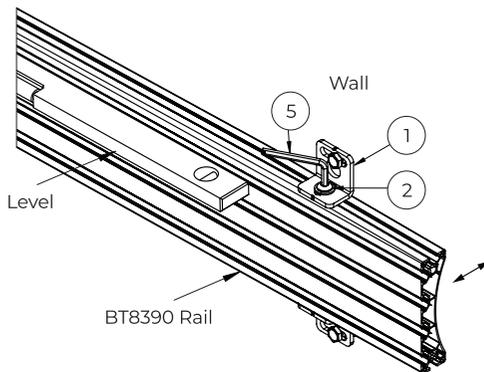


Alternative BT8390 Rail assembly



BT8390 Pole mounting



BT8392 Rail mounting




Note: Rail can be mounted facing either direction

Ultra-Slim Rail Mounting Bracket

Use With BT8390 Mounting Rails



Dimensions

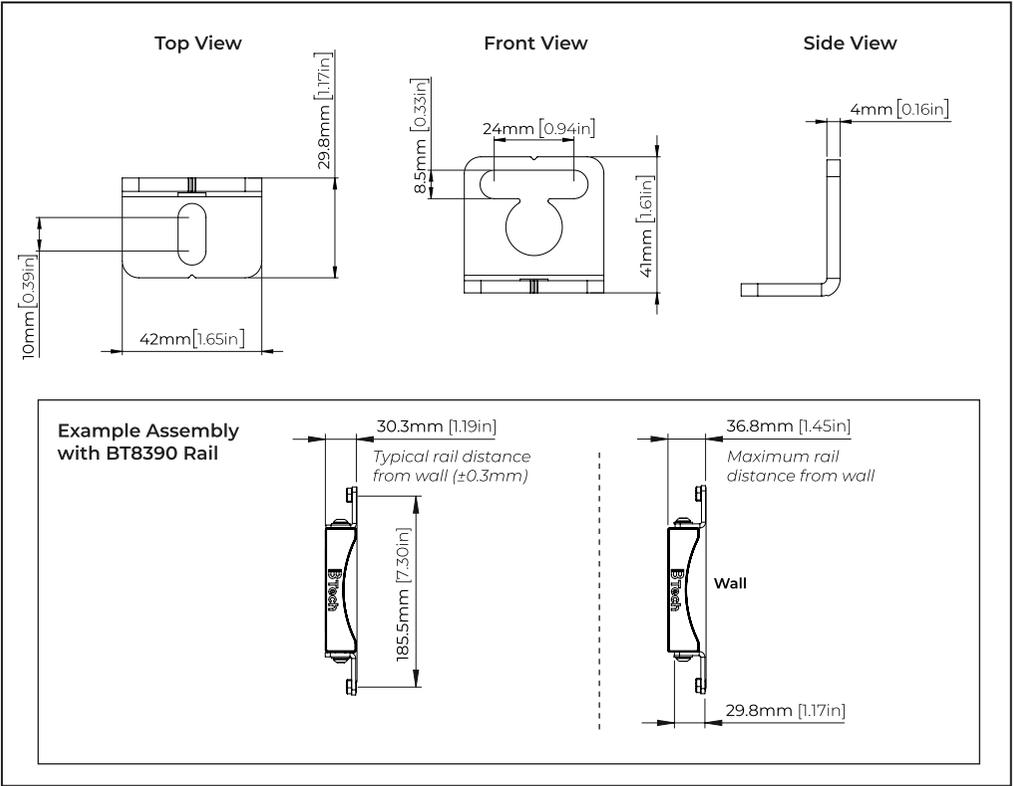

Contact: info@btechavmounts.com

©2025 B-Tech AV Mounts Corporation Ltd. All rights reserved.

B-Tech AV Mounts is a division of B-Tech AV Mounts Corporation Ltd.
B-Tech AV Mounts and the B-Tech logo are registered trademarks.
All B-Tech images and symbols are exclusive property of B-Tech AV Mounts Corporation Ltd.
All other brands and product names are trademarks of their respective owners.
Any reproduction, retransmission or republication of any part of this manual is strictly prohibited,
unless prior written permission has been granted by B-Tech AV Mounts Corporation Ltd.
Photographs are for illustrative purposes only. E&OE

AMA-BT8390-WFK8-V1.1-0525-44 Made in the P.R.C.

