

AU-D9


Bi-directional Digital/Analogue Audio Converter (DAC)



The AU-D9 is a versatile audio converter allowing users to convert analogue audio into digital or digital audio into analogue. It can simultaneously output in all 3 audio formats without any signal loss.

FEATURES

- Bi-directional Digital/Analogue Audio Converter
- Three-way conversion Coaxial to Optical & Analogue Optical to Coaxial & Analogue
- Analogue to Optical & Coaxial
- Integrated digital interpolator filter and Digital-to-Analogue Converter (DAC)
- Accepts uncompressed digital stereo audio input
- Supports sample rates from 16 to 100kHz
- Simultaneously digital & analogue audio outputs
- Provides electromagnetic-noise-free transmission
- Integrated Analogue-to-Digital Converter (ADC)

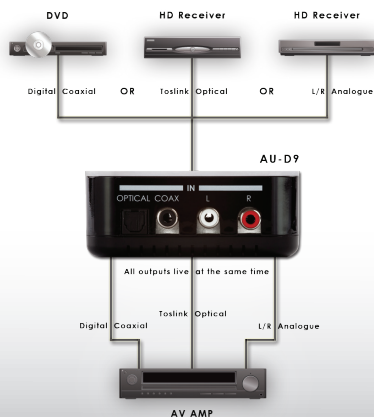

SPECIFICATIONS

Input:	1x Toslink (1x Optical DTS / Dolby Digital / 2 Channel LPCM), 1x RCA (1x Coaxial DTS / Dolby Digital / 2 Channel LPCM), 2x RCA (1x Analogue Stereo (L/R))
Output:	1x Toslink (1x Optical DTS / Dolby Digital / 2 Channel LPCM), 1x RCA (1x Coaxial DTS / Dolby Digital / 2 Channel LPCM), 2x RCA (1x Analogue Stereo (L/R))
Power:	5V/1.2A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	95m (W) x 85mm (D) x 35mm (H)
Gross Weight:	420g
Net. Weight:	200g
Packaging:	Retail Packaged

