

CONVERGE® Wall-Mount Bluetooth Expander



The Wall-Mount Bluetooth Expander enables Bluetooth audio conferencing and streaming from mobile devices to ClearOne's CONVERGE Pro 2 and Huddle audio DSP's.

Connect Fast with "Tap-to-Pair"

NFC Tap-to-Pair allows fast and simple connectivity with mobile devices.

- > Bluetooth pair name can be customized.
- > Bluetooth 3.0 compliant interface supports industry standard profiles for audio.
- > P-Link* makes wiring easy on both CP2 and Huddle systems
- > Has great range – up to 150 feet (45 meters).
- > Wall-mount design for convenient room access (single-gang electrical box).


* Modified P-Link for Huddle connections

APPLICATIONS:

- Audio conferencing
- Video conferencing
- BYOD conferencing
- Web conferencing

WORKSPACES:

- Boardrooms
- Conference rooms
- Huddle and BYOD workspaces
- Training centers
- Lecture halls
- Multi-purpose rooms
- Offices

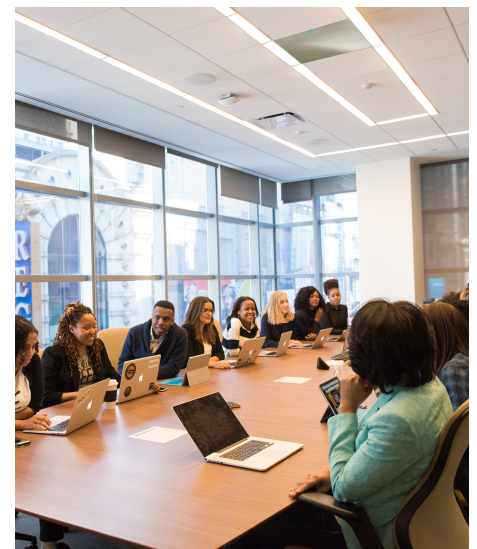

Great Room Range

Has great range – up to 150 feet (45 meters).

Great Ideas Need to be Heard™

CONVERGE[®] Wall-Mount Bluetooth Expander

BLUETOOTH WIRELESS TECHNOLOGY

- Version: 3.0
- Mode: Bluetooth Classic
- Supported Profiles
 - Hands-Free Profile v1.6 (HFP)
 - Distribution Profiles v1.5 (A2DP, AVRCP)
- Wireless Performance
 - Frequency Band: 2390 MHz to 2483.5MHz
 - Transmit Power: +6.5dBm
 - Receiver Sensitivity: -90dBm3
 - Wireless Range: Up to 150 feet (45 meters)

INDICATORS AND MOMENTARY SWITCH

- LED
 - Blinking Blue - Ready to Pair
 - Solid Blue - Paired
- Toggle Switch
 - Press to reset Bluetooth - break Bluetooth connection and set into pairing mode.

P-LINK IN (PROPRIETARY NETWORK)

- RJ45: Cat5e, Cat6, P-Link In only
- Cable Length: 200ft (test up to 250 ft)

POWER CONSUMPTION

- P-Link In, RJ45
- 2.24 Watt

THERMAL

- 7.64 BTU/Hr

OPERATING TEMPERATURE

- 14°F/-10°C to 104°F/40°C

DIMENSIONS

- 4.4" H x 1.7" W x 1.6" D (112.5 mm H x 44 mm W x 40 mm D)

WEIGHT

- Product weight: .19 lbs (88g)
- Shipping weight: .35 lbs (.16kg)

COMPLIANCE

- This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.
- FCC ID: QOQWT32I
- IC: 5123A-BGTWT32I
- MIC ID: 209-J00089
- KCC: MSIP-CRM-BGT-WT32i

PART NUMBER

910-3200-303

SALES AND INQUIRIES**Headquarters**

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

US & Canada

Tel: +1.801.975.7200
Fax: +1.801.303.5711

International

Tel: +1.801.975.7200
global@clearone.com

Sales

Tel: +1.801.975.7200
sales@clearone.com

TechSupport

Tel: +1.801.974.3760
tech.support@clearone.com