

Highlights:

- 19" Power distribution unit
- Male Schuko (CEE 7/7) input connection
- Black aluminum housing
- Chassis earth connection point
- 16A ~ 250 VAC / 4000 W Max
- 2.5 meter fixed connection cable
- Dimmable rack lighting (LED) with ON/OFF switch
- Charging front USB front connection (2x)



Product information:


The PSR529 series includes a switchable LED rack light, two front USB jacks and a 16 Amps circuit breaker on the front panel of the unit. Power surge & spike protection is offered by the internal protector network, while a voltage and current indicator allow continuous voltage and power consumption monitoring. Power distribution for up to nine devices is made possible using the rear output sockets.


Product Features:

Dimensions	483 x 44.7 mm (W x H) (with mounting ears)
Cable length	2.5 m
Unit height	1 HE
Weight	1.92 kg
Power handling	250 V AC ~ 16 A / 4000 W

Variants:

- PSR529G/B - Black version

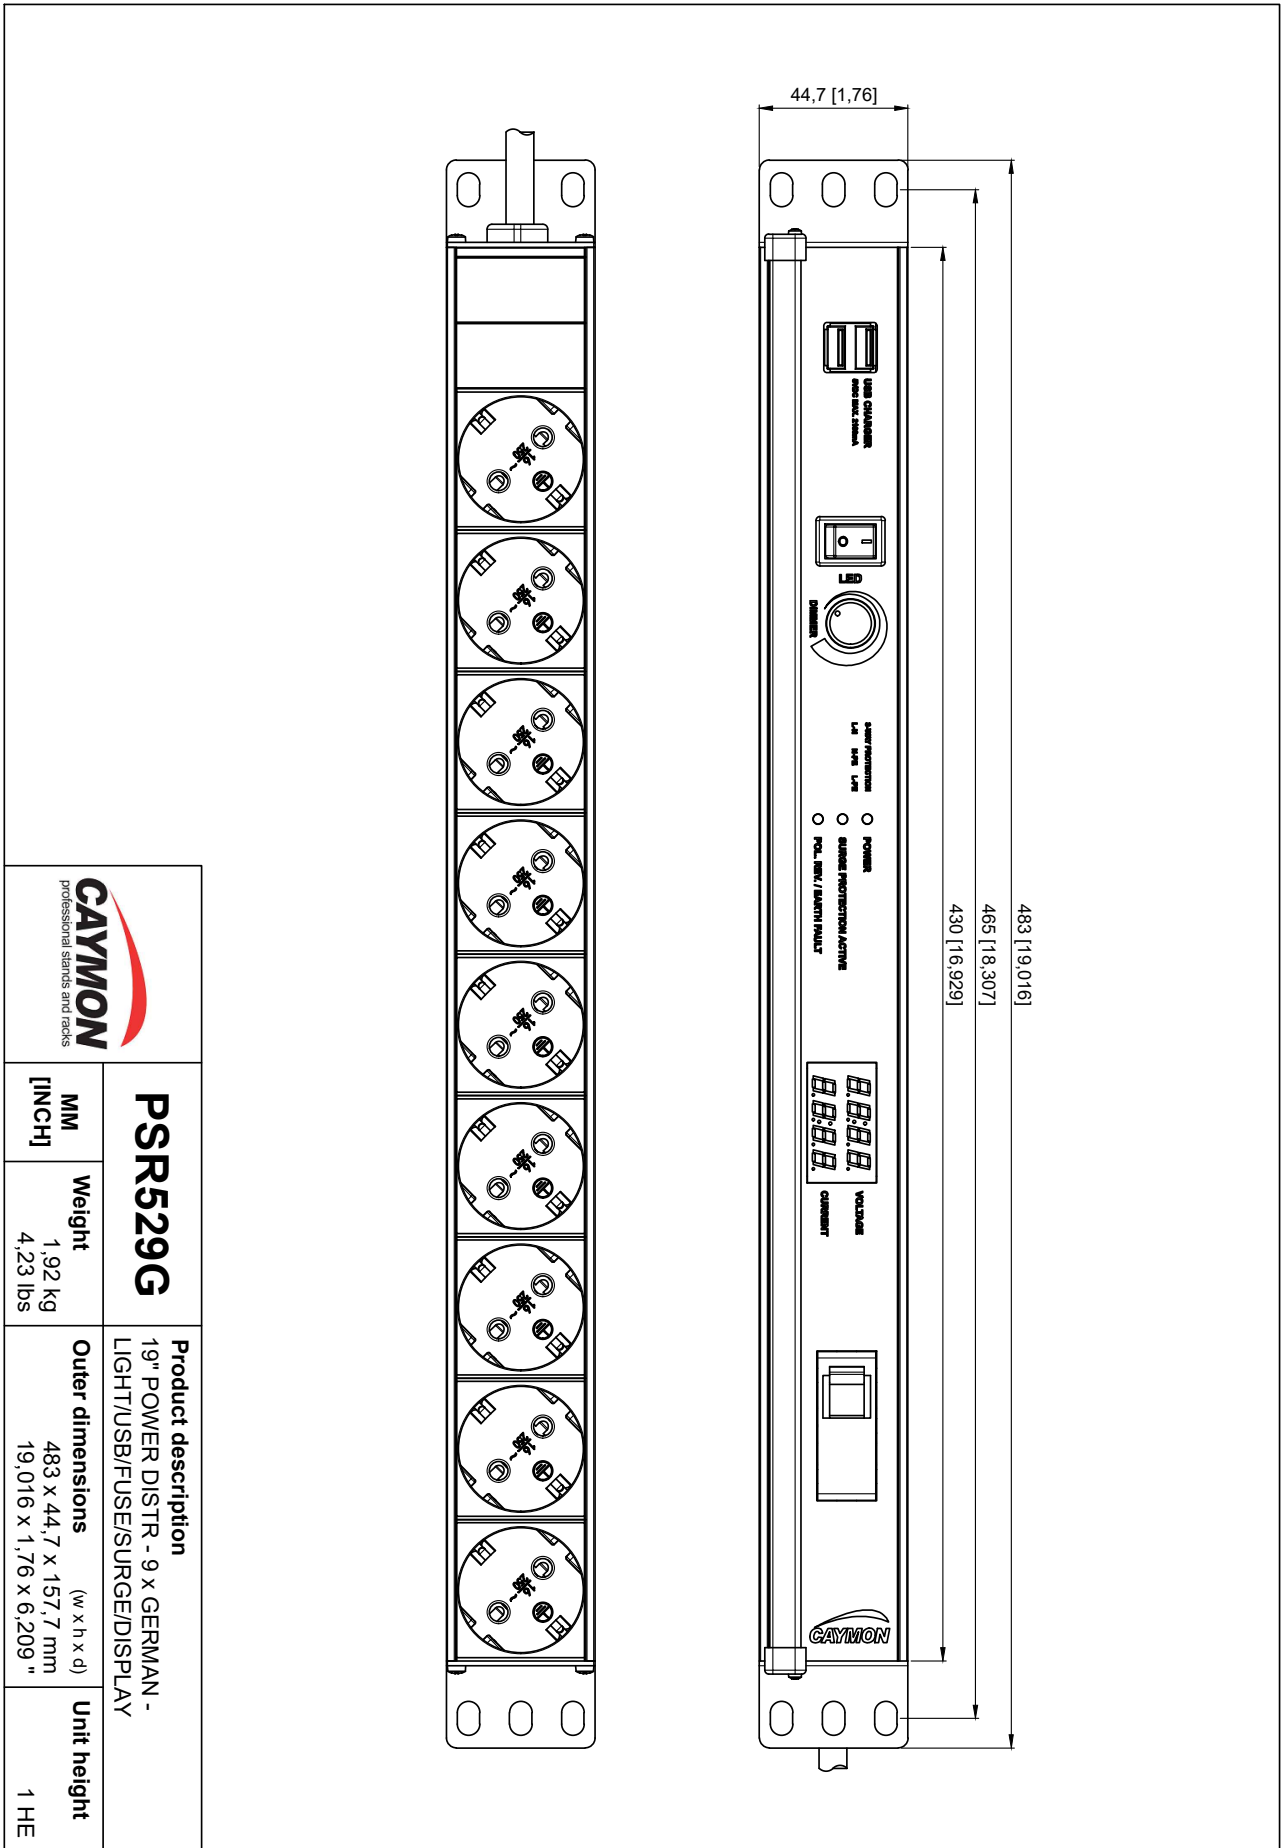

		PSR529G		Product description 19" POWER DISTR - 9 X GERMAN - LIGHT/USB/FUSE/SURGE/DISPLAY		Unit height 1 HE