

T Series

2/4-Channel High-Performance Amplifier Platform with DSP and Dante™



- TOURING
- INSTALLATION



ArmoníaPlus
System Manager

The T Series is a flexible and cost effective amplifier platform loudspeaker processor. The range consists of 2 and 4 channel models supporting channel powers from 750 W to 4000 W.

All models deliver high peak voltage allowing high SPL with single 8/16 ohm cabinets. The high voltage is also good for sharing power between the channels for applications such as bi-amped loudspeakers or subwoofers with passive tops.

The T Series offers input via Dante, AES3, and analog. The Dante™ and AES3 solutions are optimized for daisy-chained distribution of 2-channel audio, enabling routing to many amplifiers without the need for external switches, repeaters, or splitters.

This helps in simplifying the process of setting up a typical networked system.

The loudspeaker processing features set a new benchmark for small and medium sized systems and stage monitoring applications.

The T Series can be controlled and configured in various ways:

- through ArmoníaPlus, where it can be in mixed groups with advanced EQ together with other Powersoft products

- from the front panel display for things like preset recall (also per output), gain, delay, mute. This makes it the perfect match for powering the smaller solutions that are offered by rental companies. The display also shows the available

headroom, along side with other status monitoring

- with the dedicated webapp, that runs on any device with a browser (e.g. a tablet) and access the amplifier via an external WiFi access point to control all parameters.


- ▶ Renowned sound clarity
- ▶ Group controllable advanced EQ with raised cosine filters
- ▶ Large preset library
- ▶ Preset compatibility with X Series
- ▶ Long FIR filters (42.6 ms)




T Series

2/4-Channel High-Performance Amplifier Platform with DSP and Dante™

2 Channel - T302, T602, T902

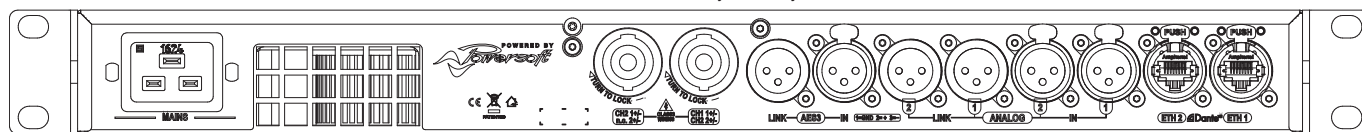

4 Channel - T304, T604, T904

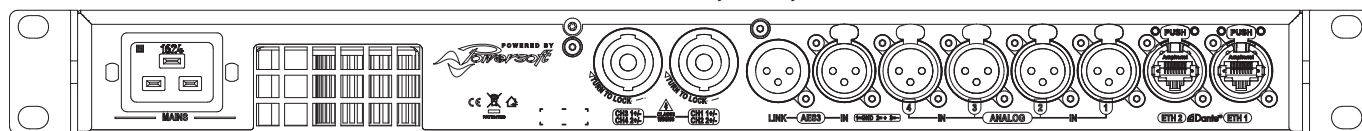

Specifications

Channel Handling		T302 - T602 - T902		T304 - T604 - T904			
Number of output channels	2 (2 Speakon NL4)	4 (2 Speakon NL4)					
(bridgeable per channel pair)							
Number of input channels	2 XLR (female) 2 XLR LINK (male)		4 XLR (female)				
Analog	2 XLR (female) 2 XLR LINK (male)		4 XLR (female)				
Digital	AES3 - 1 XLR (female) LINK - 1 XLR (male)		AES3 - 1 XLR (female) LINK - 1 XLR (male)				
Audio							
	Gain	T302	T602	T902	T304	T604	T904
Input sensitivity @ 8 Ω	32 dB	2.57	2.57	3.10	2.57	2.57	3.10 Vrms
S/N (20Hz - 20kHz @ 8Ω, Typ.)		110	110	108	110	110	108 dB(A)
Max input level		24 dBu					
Frequency Response		20 Hz - 20 kHz +/-0.5 dB					
Crosstalk (1 kHz)		<-70 dB					
Input impedance		20kΩ Balanced					
CMRR		>65 dB					
THD+N (from 0.1 W to Half Power)		< 0.1% (typical < 0.05%)					
SMPTE IMD (from 0.1 W to Half Power)		< 0.1% (typical < 0.05%)					
Output impedance at 100 Hz		26 mΩ					
DSP							
AD converters		24 Bit Tandem™ @ 48 kHz 125 dB-A Dynamic Range - 0.005 % THD+N					
DA converters		24 Bit Tandem™ @ 48 kHz 117 dB-A Dynamic Range - 0.003 % THD+N					
Sample rate converter		24 Bit @ 96 kHz 140 dB Dynamic Range - 0.0001 % THD+N					
Internal precision		32 bit floating point					
Latency		2.5 ms fixed latency architecture					
Memory/Presets		256 MB (RAM) plus 512 MB flash for presets					
Delay		2 s (input) + 100 ms (output) for time alignment					
Equalizer		Raised-cosine, custom FIR, parametric IIR: peaking, hi/lo-shelving, all-pass, band-pass, band-stop, hi/lo-pass					
Crossover		linear phase (FIR), Butterworth, Linkwitz-Riley, Bessel: 6 dB/oct to 48 dB/oct (IIR)					
Limiters		TruePower™, RMS voltage, RMS current, Peak limiter					
Damping control		Active DampingControl™ and LiveImpedance™ measurement					
Display Panel							
Display		1.8" Colour TFT, 160x128 pixels, 600 nits					
Control		8 pushbuttons with RGB backlight					
Extra		USB port for external memory					

Output Stage	T302	T602	T902	T304	T604	T904
per channel @ 8 Ω (symmetrical)*	1200 W	1300 W	1800 W	750 W	1250 W	1600 W
per channel @ 4 Ω (symmetrical)*	1500 W	2500 W	3200 W	750 W	1500 W	2000 W
per channel @ 2 Ω (symmetrical)*	1500 W	3000 W	4000 W	750 W	1500 W	1800 W
per channel @ 8 Ω (asymmetrical)**	1300 W	1400 W	1800 W	1200 W	1250 W	1800 W
per channel @ 4 Ω (asymmetrical)**	2200 W	2500 W	3600 W	1200 W	2100 W	2300 W
per channel @ 2 Ω (asymmetrical)**	1600 W	3800 W	4600 W	1200 W	1600 W	1800 W
@ 4 Ω Bridged	3000 W	6000 W	8000 W	1500 W	3000 W	3600 W
@ 8 Ω Bridged	3000 W	5000 W	6400 W	1500 W	3000 W	4000 W
Maximum unclipped output voltage	145 V _{peak}	145 V _{peak}	175 V _{peak}	145 V _{peak}	145 V _{peak}	175 V _{peak}
Maximum output current	50 A _{peak}	100 A _{peak}	110 A _{peak}	50 A _{peak}	50 A _{peak}	55 A _{peak}

*Calculated by driving and loading symmetrically all the channels.
**Calculated by driving all channels, but with every second channel at -6dB

Power & Thermal		T302	T602	T902	T304	T604	T904
@ 120 V	Standby Power	13.5	15	15	15	15	W
	Idle Power	23	32	33	32	32	W
	1/8 Power @ 4Ω	517	824	1073	532	1054	W
	Current Draw	4.6	7.6	9.6	4.7	9.5	A _{rms}
	Thermal Loss	485	678	931	537	1039	BTU/h
@ 230V	Standby Power	14	16	16	16	16	W
	Idle Power	23	32	33	32	32	W
	1/8 Power @ 4Ω	527	839	1068	525	1027	W
	Current Draw	2.7	4.3	5.3	2.7	5.2	A _{rms}
	Thermal Loss	517	731	913	512	944	BTU/h

Power supply	Universal regulated switch mode with PFC, SRM
Nominal voltage (±10%)	100-240 VAC @ 50-60Hz
Operating Voltage	90-264 VAC @ 50/60 Hz
AC Mains connector	IEC C20 inlet (20 A max) region-specific power cord provided

Networking	
Standards compliance	auto sensing Gigabit Ethernet IEEE 802.3ab
Supported topologies	Daisy chain, Star
Remote interface	ArmoniaPlus™

Construction	T302	T602	T902	T304	T604	T904
Dimensions	484 x 405 x 44.5 mm (19 x 16 x 1.75 in)					
Weight	6.7 kg	7.5 kg	7.8 kg	7.1 kg	7.5 kg	7.8 kg

Data subject to change without notice.

