

► Features



- Stores up to 9 units of 19" equipment
- Cable entry on bottom
- Punched square holes for use with snap-in cage nuts
- 1.5 mm thick cold rolled steel frame
- Easy assembly in 5 minutes
- Removable rear panel

► Description

The PR209 is a professional 19" metal rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. The rack comes in a flat pack as DIY kit. It is a solid construction with a 1.5 mm thick cold rolled steel frame and plates, finished with a black (RAL9004) fine structured powder coating. The rack is provided with punched rack profiles for use with snap-in cage nuts on the front side and stores up to 9 units. The rear panel can be screwed off for easy installation and has a cable entrance on the bottom. Optional available wheels provide mobility to the equipment.



► Technical Drawing

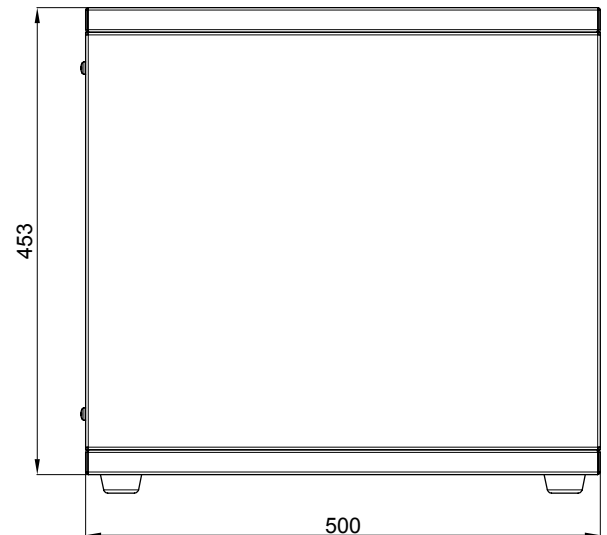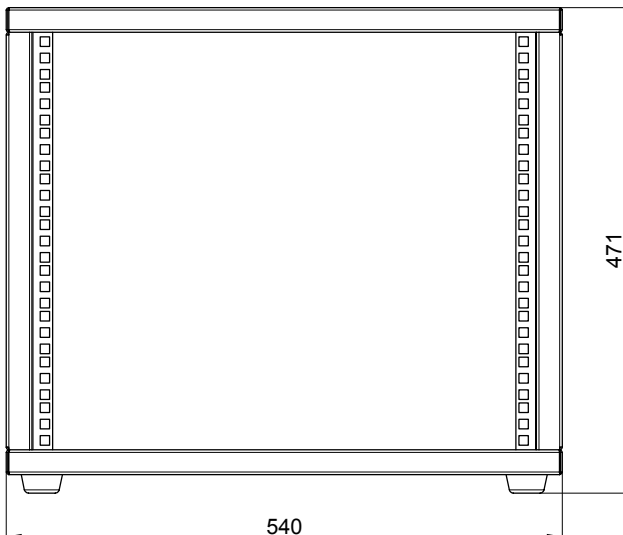

► Specifications

PROPERTY	VALUE
Unit height	9 HE
Usable depth	475 mm
Width	540 mm
Depth	500 mm
Height (without feet)	453 mm
Height (with feet)	471 mm
Weight	17,7 kg
Rack color	Black (RAL 9004)

► Optional Accessories

ARTICLE	DESCRIPTION
PR210WS	Wheel set for PR2xx racks
KM600	Cage nuts
KS600	Screws for cage nuts

▶ **Architects' and Engineers' Specifications**

The rack shall be a floor standing type with following dimensions: Height 471 mm, Depth 500 mm, Width 540 mm, have a Weight of 17,7 kg and hold up to 9 units. The rack will have to comply with ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. The rack shall be constructed out of cold rolled steel with a thickness of 1.5 mm and have a textured powder coating in black (RAL9004) color. The rack will come as a flat pack DIY kit which is quick & easy to assemble. The back panel of the rack will be removable and fitted with a cable entry on the bottom. The rack shall have mounting profiles on the front with punched square holes for use with snap-in cage nuts for easy mounting of equipment. The rack will have optional wheels for mobility.